

# Ambu® aScope™ 4 RhinoLaryngo Slim

Single-use flexible rhinolaryngoscope



## Key Benefits

- High quality imaging on the full-HD monitor Ambu® aView™ 2 Advance
- Wide range of connectivity options
- Transfer patient imaging data to PACS
- Always ready avoiding any delays
- Improves workflow with no hassle of cleaning and repairs

## Be more productive, wherever your work takes you

Whether you need high-quality imaging and easy connectivity options for the outpatient clinic or a portable grab-and-go solution for when you're called to a consult, Ambu aScope™ 4 RhinoLaryngo can help you be more productive.

### Excellent imaging and connectivity to perform and document your procedures confidently

The aScope 4 RhinoLaryngo Slim endoscope is designed with a small 3.0mm outer diameter to help minimize patient discomfort during rhinolaryngoscopy procedures.

The solution includes the high-quality, portable full-HD Ambu® aView™ 2 Advance monitor. The monitor's excellent imaging capabilities combined with the scope's high-bending angles and precise tip motion enable you to navigate in the upper airway and identify anatomical structures confidently.

Furthermore, the solution enables you to record images and videos of the procedure, which you can then transfer to the PACS to enable access from your Electronic Medical Records (EMR) system.

### Single-use efficiency streamlines your workflow


The aScope 4 RhinoLaryngo is a single-use flexible rhinolaryngoscope that helps you be more productive:

- No cost or hassle associated with cleaning and repairs.
- Simply take it with you, use it and then discard.
- High-quality video imaging that doesn't compromise on the portability you require for consultations outside the clinic.
- A brand-new endoscope with the same high quality at every procedure.

You can always count on cost transparency with the aScope 4 RhinoLaryngo endoscope.

# Specifications

Optical system	
Field of view	85°
Direction of view	0° (forward viewing)
Depth of field	6 - 50 mm
Illumination method	LED
Insertion portion	
Bending section	130° up, 130° down
Insertion cord diameter	3.0 mm (0.12")
Distal tip diameter	3.5 mm (0.14")
Maximum diameter of insertion portion	3.5 mm (0.14")
Working length	300 mm (11.8")
Operating environment, storage & transportation	
Temperature - transportation	10 - 40° C (50 to 104° F)
Temperature - operating environment	10 - 40° C (50 to 104° F)
Temperature - storage	10 - 25° C (50 to 77° F)
Relative humidity	30 - 85%
Atmospheric pressure	80- 109 kPa
Sterilisation	
Method of sterilisation	ETO




aScope™ 4 RhinoLaryngo Slim is always comfortable to hold thanks to its lightweight and ergonomic design



Ambu® aScope™ 4 RhinoLaryngo Slim and Ambu® aView™ 2 Advance

## Ordering specifications\*

Item no.	Quantity
510001000 - aScope 4 RhinoLaryngo Slim	5

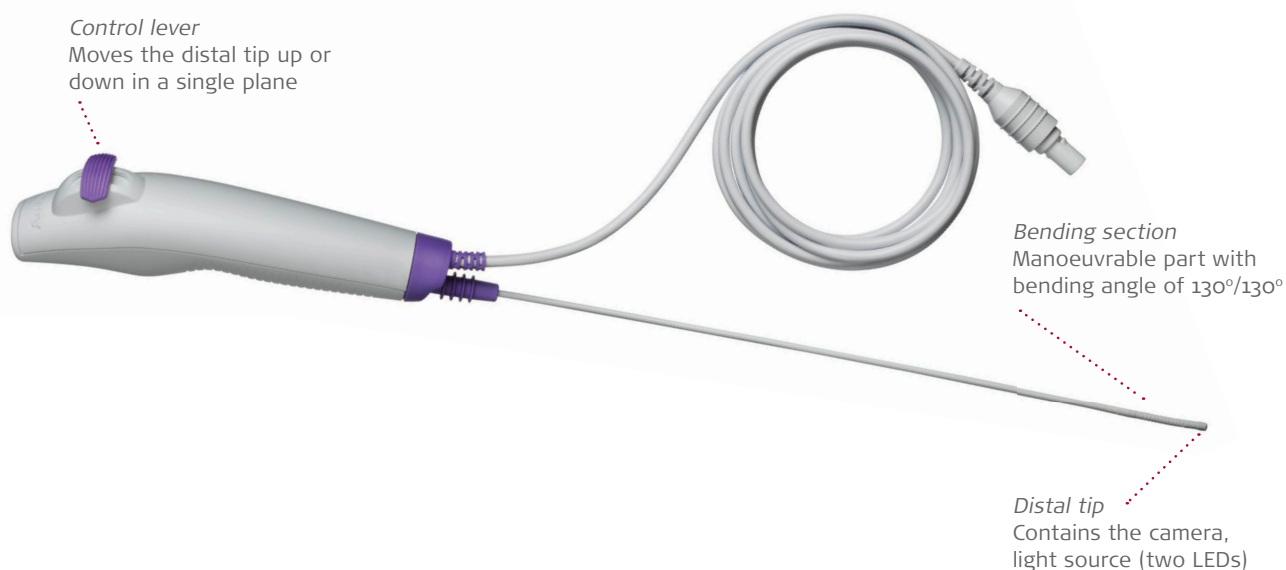

### Ambu A/S

Baltorpbakken 13  
DK - 2750 Ballerup  
Denmark  
Tel. +45 7225 2000  
ambu.com

\* aScope 4 RhinoLaryngo Slim is not available for sale in all countries. Please contact your local Ambu sales representative.